



### Main

Range of product	Modicon Quantum automation platform
Product or component type	RIO drop adaptor module

### Complementary

Product compatibility	Quantum
Number of I/O expansion module	<= 27
Type of cable	Coaxial 75 Ohm
Transmission rate	1544 Mbit/s
Dynamic range	35 dB
Isolation voltage	500 V DC coaxial center and ground
Electrical connection	1 female connector F elbowed with single cable
Diagnostics startup	Executive checksum Power up and runtime RAM address/data
Power dissipation in W	3 W 1 channel
Bus current requirement	600 mA 1 channel
Module format	Standard

### Environment

Resistance to electrostatic discharge	8 kV on air conforming to IEC 801-2 4 kV contact conforming to IEC 801-2
Resistance to electromagnetic fields	10 V/m 80...1000 MHz conforming to IEC 801-3
Ambient air temperature for operation	0...60 °C
Ambient air temperature for storage	-40...85 °C
Relative humidity	95 % without condensation
Operating altitude	<= 5000 m

### Offer Sustainability


Sustainable offer status	Green Premium product
RoHS	Compliant - since 0901 - <a href="#">Schneider Electric declaration of conformity</a>
REACH	Reference not containing SVHC above the threshold
Product environmental profile	Available <a href="#">Download Product Environmental</a>
Product end of life instructions	Need no specific recycling operations

### Contractual warranty

Period	18 months
--------	-----------

Racks for Modules Mounting

Dimensions of Modules and Racks

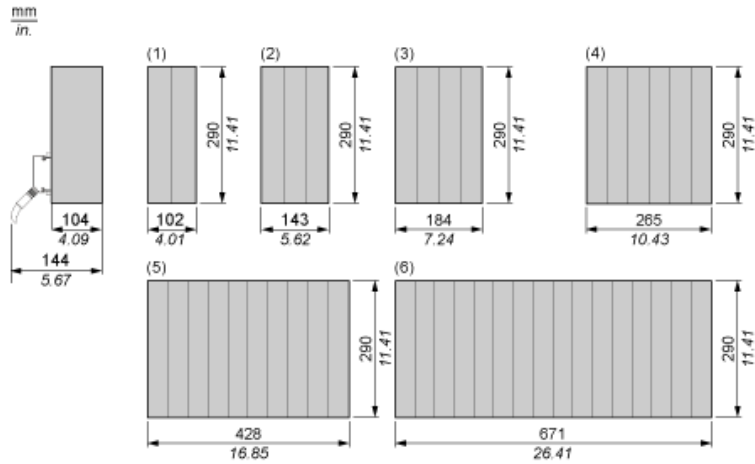

- (1) 2 slots
- (2) 3 slots
- (3) 4 slots
- (4) 6 slots
- (5) 10 slots
- (6) 16 slots